Mouldings

...the right choice

Subtle but seen, attention to detail

Simmonds Select Mouldings are an essential element to any interior environment & should be given the same amount of consideration and discussion as your choice of colours or furniture.

Simmonds Select Mouldings create continuity with the past whilst echoing the elegance and style of the post war era.

Good design depends on close attention to detail and quality finishing. Simmonds Select Mouldings provide the right product to give your required space the finishing touch it needs.





STANDARD ARCH & SKIRT PROFILES



66/92/138 x 18 Lambs Tongue


42/66 x 11 Pencil Round








HERITAGE ARCH & SKIRT PROFILES

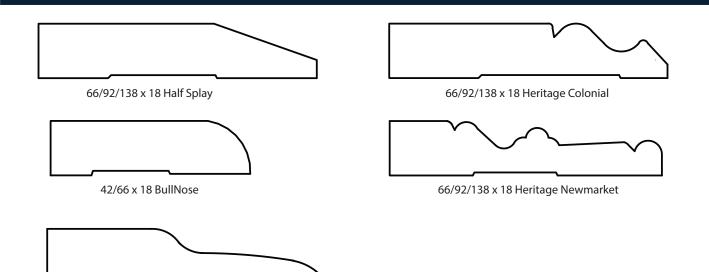


TRIM PROFILE

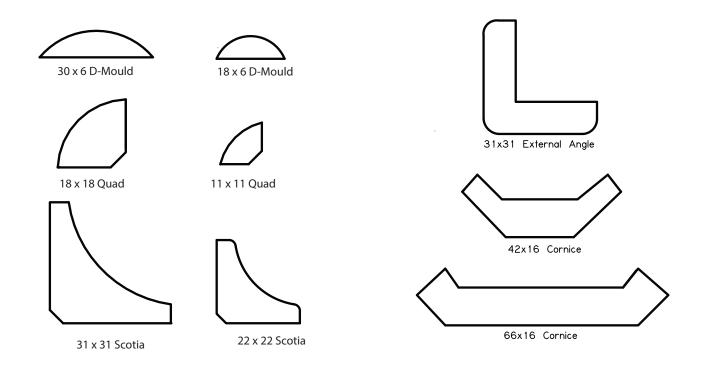

				DAR RANGE
11mm	18mm	18mm	30mm	42mm
11 x 11	18 x 18	95 x 18	42 x 30	42 x 42
18 x 11	31 x 18	98 x 18	66 x 30	66 x 42
31 x 11	42 x 18	112 x 18	92 x 30	92 x 42
42 x 11	46 x 18	116 x 18		138 x 42
66 x 11	66 x 18	163 x 18	31 x 31	
92 x 11	81 x 18	187 x 18		
116 x 11	86 x 18			
138 x 11	92 x 18			

H3 TREATED & PRIMED

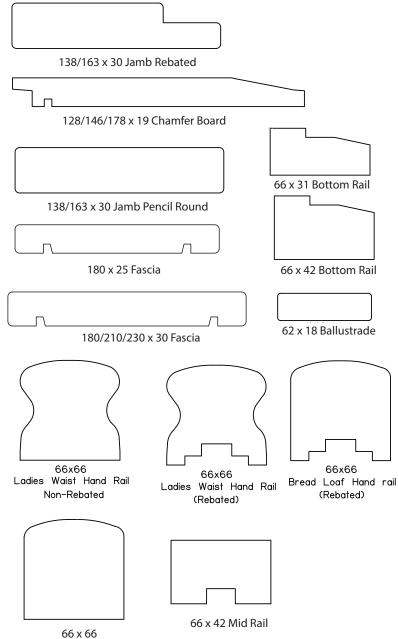

Our Primed H3 Treated product range utilises the latest technology available in Glue formulations and Azole treatment chemicals to provide you with the assurance that the product is fit for purpose.

Product sourced from Arauco comes with the added benefit of an oil based primer that is then sanded before a coating of acrylic primer is added to prepare the timber for the final top coats of your choice.



Bread Loaf Hand Rail Non-Rebated

STORAGE AND HANDLING

Timber is a natural product and it will react to changes in the environment during the life of the product. Every effort is made during manufacturing to mimimise the effect these changes may have on the final appearance of the product, however raised grain, swelling and resin bleed are natural characteristics and may occur as a result of changes to the climatic conditions. To minimise the opportunity for these changes to impact on the finished product we recommend the following steps be undertaken when storing, handling and installing these products.

- All products should be stored flat at least 150mm off the ground and evenly supported in a well ventilated area. Protect the product from moisture (including ground moisture), humidity and weather at all times.
- Full length mouldings should not be picked up from one end only, always ensure that there is adequate support for the length of the board, to prevent the board from breaking under its own weight.
- For treated products, ensure that all surfaces that have been cut, drilled or rebated are re-treated with a suitable in-can timber preservative, following the manufacturers recommendations.
- Pre-Primed products have been coated with a premium quality primer designed to provide protection and minimise the effects of checking, cracking and cupping of the pine mouldings, prior to the application of two coats of a premium quality top coat finish in accordance with the paint manufacturers recommendations.
- Pre-Primed prodcucts must be painted within 4 weeks of installation and should remain covered on site until fixed in position.



Distributed by:

Sydney 1 Durham Street Rosehill NSW 2142 Ph + 61 2 9638 7333 Fax + 61 2 9684 6466 **Brisbane** 146-164 Buchanan Road Banyo QLD 4014 Ph + 61 7 3267 0244 Fax + 61 7 3621 7755 Melbourne 22-32 Nathan Road Dandenong VIC 3175 Ph + 61 3 9791 2241 Fax + 61 3 9791 2243 New Zealand 15B Gabador Place Wellington Auckland NZ 1060 Ph + 64 9 573 0280 Fax + 64 9 573 0282

www.simmondslumber.com.au